
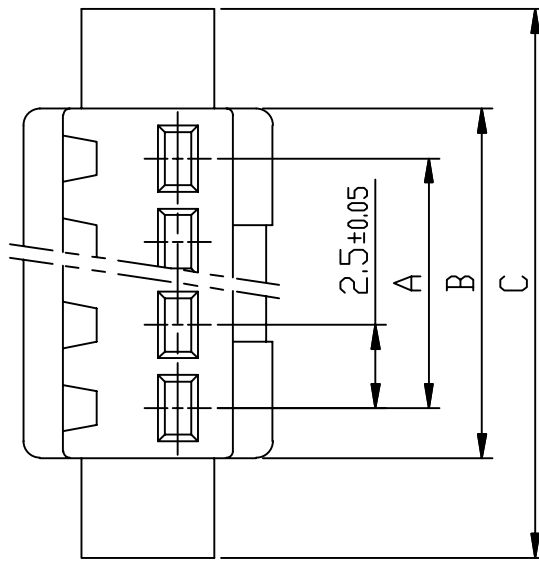


A B C D E F G H

1

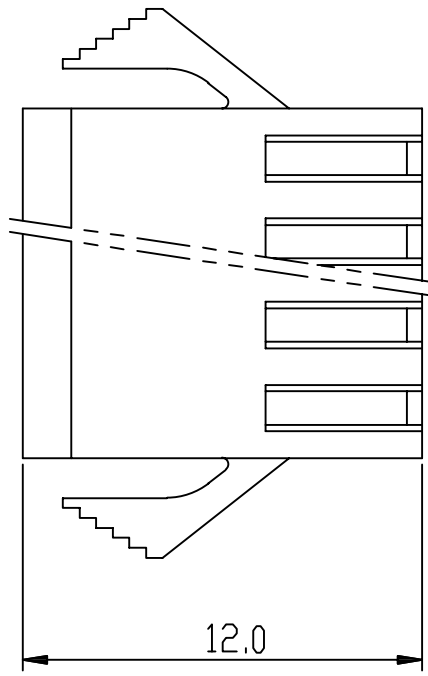


■ SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: 10mΩ max
- Insulation resistance: 500MΩ min
- Temperature range: -25° C ~ +85° C

■ HOUSING

- Material: PA66 UL94V-0

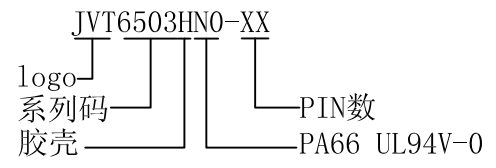


2

2

3

3

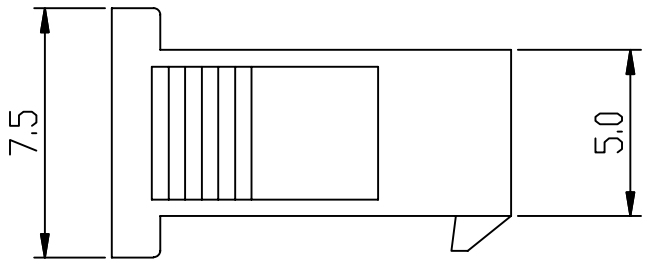

Poles	Dimensions mm		
	A	B	C
2	2.50	5.5	11.6
3	5.00	8.0	14.1
4	7.50	10.5	16.6
5	10.00	13.0	19.1
6	12.50	15.5	21.6
7	15.00	18.0	24.1
8	17.50	20.5	26.8
9	20.00	23.0	29.1
10	22.50	25.5	31.6
11	25.00	28.0	34.1
12	27.50	30.5	36.6
13	30.00	33.0	39.1
14	32.50	35.5	41.6
15	35.00	38.0	44.1
16	37.50	40.5	46.6

GENERAL TOLERANCE
0 ±0.35
.0 ±0.30
.00 ±0.20
.000 ±0.10

4

4

版本	变更内容	日期	乔业电子有限公司 CHYAO YEE CONNECTORS CO., L TD		单位	mm	比例	1:1	日期	20131117
----	------	----	---	--	----	----	----	-----	----	----------

核准	审核	绘图	品名	SM 2.50mm 公HSG		
	bolly	许向毅	料号	JVT6503HNO-XX		
			图名	041	版本	A

A B C D E F G H